


Customized, 4Pin Male Cable Assembly For Smart System, IP67



CE RoHS

◆ Dimensions of Cable Assembly (Unit is mm)

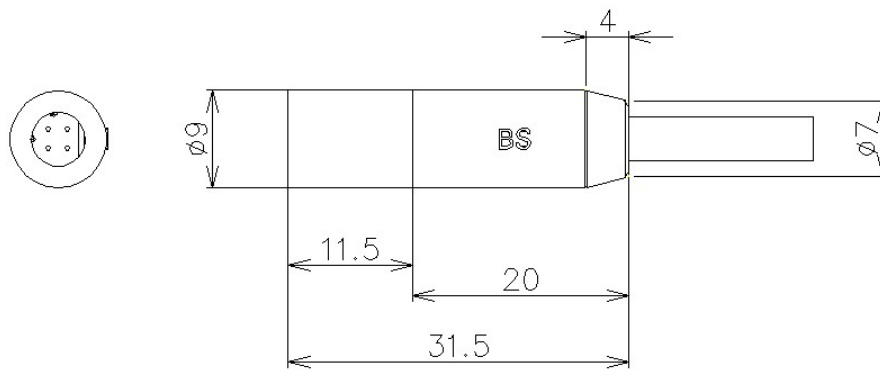


◆ General Information of Cable Assembly

Rated Voltage	12V /DC
Insulation Resistance	≥10MΩ
Contact Resistance	≤3Ω
Water Resistance Level	IP67 in locked condition
Cable	Cable, length can be customized
Application	Original Bosch replacement cable, Connects the drive unit with the control unit

◆ SKU Table

SKU No.	Poles	Conn. Type	Overmold Type	Remark
T-CUS4M-002	4	Male	Straight	Customized

◆ Dimensions of Related Connector (Unit is mm)

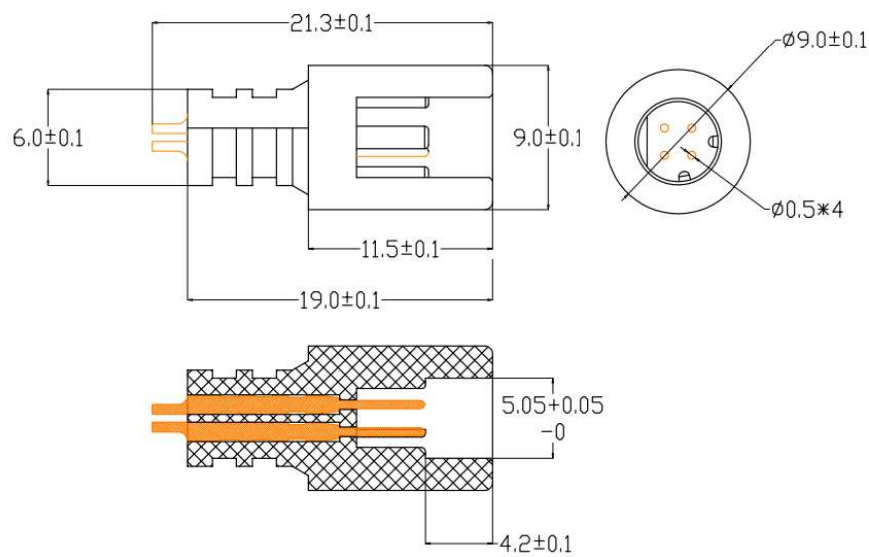

◆ General Information of Connector

Ambient Temperature:	-20°C ~ +80°C	Insulation Resistance:	$\geq 100\text{M}\Omega$
Connector Body:	PA66, black	Fire resistance:	UL94V-0
Connector Contacts:	Brass with golden plated	Water Resistance:	IP66