


Customized, Type C, Female Cable Assembly, IP68



CE RoHS

◆ Dimensions of Cable Assembly (Unit is mm)

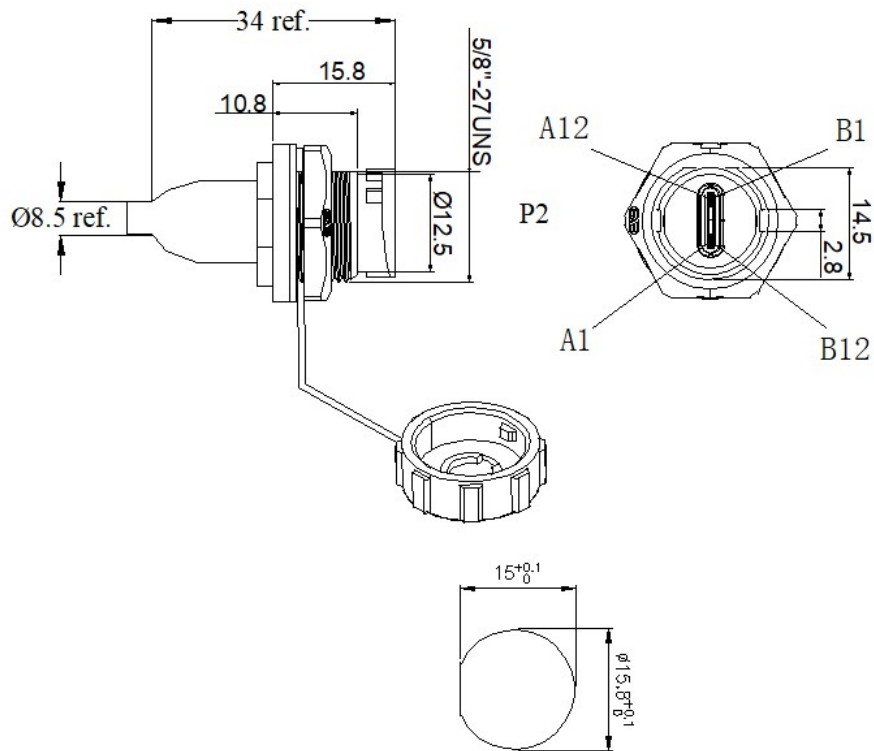


◆ General Information of Cable Assembly

Rated Voltage	30V /DC
Insulation Resistance	≥5MΩ
Contact Resistance	≤3Ω
Water Resistance Level	IP68 in locked condition
Cable	UL2464 22AWG*4C PVC blk, can be customized

◆ SKU Table

SKU No.	Poles	Conn. Type	Type	Remark
T-CUSTC4F-002	4	Female	Assembly	Customized

◆ Dimensions of Related Connector (Unit is mm)

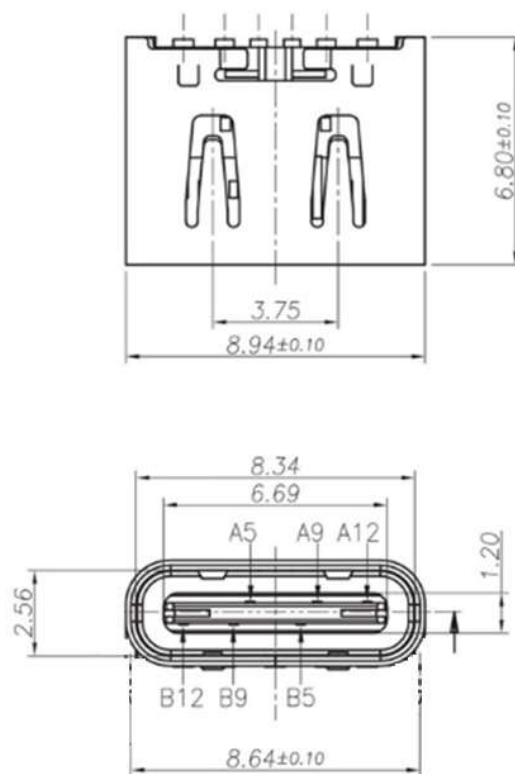

◆ General Information of Connector

Ambient Temperature: -25°C ~ +85°C

Insulation Resistance: $\geq 5M\Omega$

Connector Body: PBT, black

Fire resistance: UL94V-0

Connector Contacts: Brass with silver/golden plated