


9Pin D-SUB Female Molded Cable Assembly, Straight



CE RoHS

◆ Dimensions of Cable Assembly (Unit is mm)

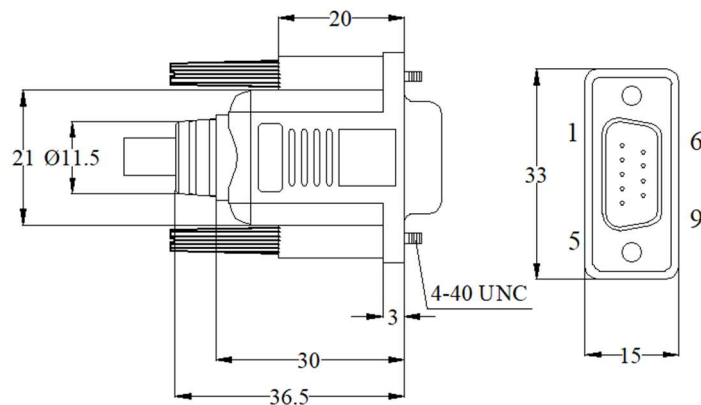


◆ General Information of Cable Assembly

Rated Current	4A Max.
Rated Voltage	30V
Insulation Resistance	≥100MΩ
Contact Resistance	≤5Ω
Operation Temperature	-20℃ ~+70℃
Poles	9 Poles straight are available, 9 Poles right angle can be customized (Refer to below SKU table)
Cable	PUR/PVC cable (18-28AWG) options
Water Resistance	IP67 in lock condition can be customized if need

◆ SKU Table

SKU No.	Poles	Conn. Type	Overmoding Type	Remark
T-DSUBSTF-09-001	9	Female	Straight	Locking type: Fix screw
T-DSUBRAF-09-001	9	Female	Right Angle	Locking type: Fix screw

◆ Dimensions of Related Components (Unit is mm)

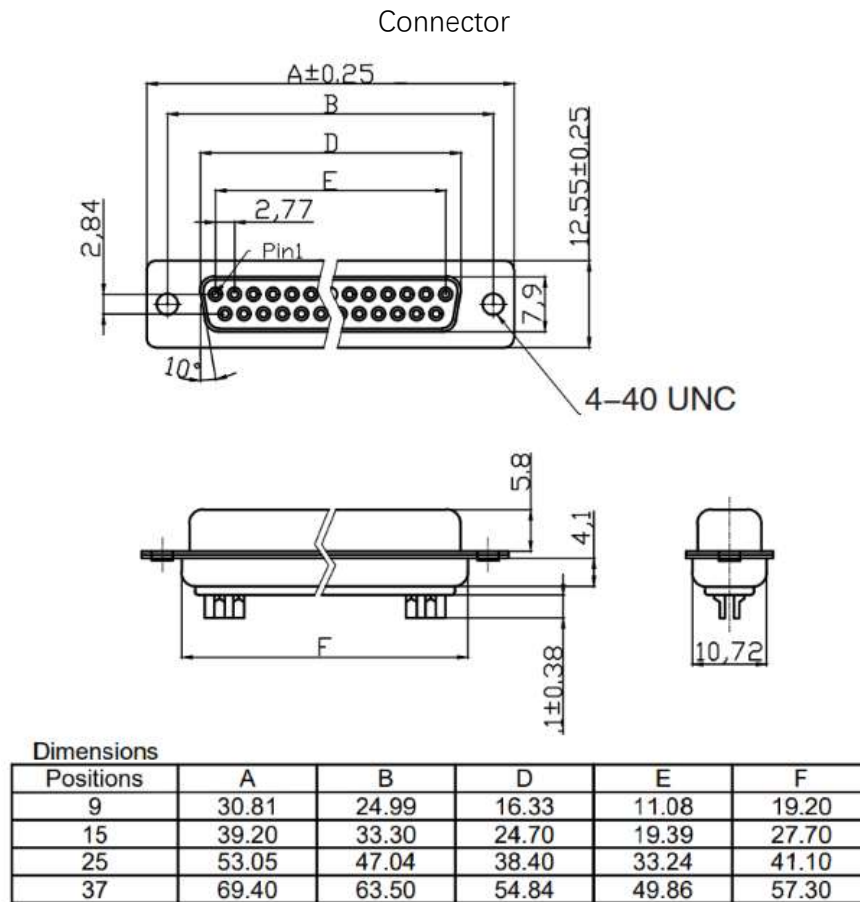

◆ General Information of Connector

Ambient Temperature:	-25℃ ~ +70℃	Insulation Resistance:	≥100MΩ
Connector Body:	PBT	Contact Resistance:	≤10mΩ
Connector Contacts:	Brass with nickel/gold plated	Shell:	Unavailable
Pitch:	2.84mm	Mating Endurance:	500 Cycles