


9 Pin D-SUB Male Molded Cable Assembly, Straight



CE RoHS

◆ Dimensions of Cable Assembly (Unit is mm)

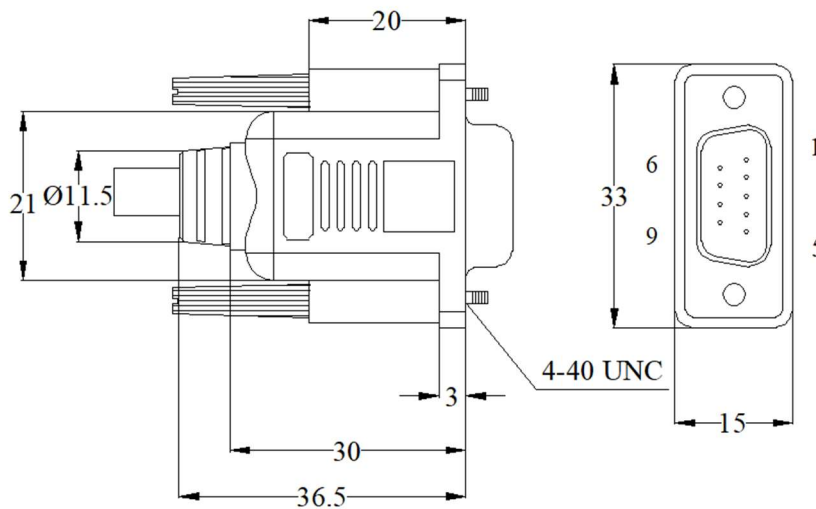


◆ General Information of Cable Assembly

Rated Current	4A Max.
Rated Voltage	30V
Insulation Resistance	≥100MΩ
Contact Resistance	≤5Ω
Operation Temperature	-20℃ ~+70℃
Poles	9 Poles straight are available, 9 Poles right angle can be customized (Refer to below SKU table)
Cable	PUR/PVC cable (18-28AWG) options
Water Resistance	IP67 in lock condition can be customized if need

◆ SKU Table

SKU No.	Poles	Conn. Type	Overmoding Type	Remark
T-DSUBSTM-09-001	9	Male	Straight	Locking type: Fix screw
T-DSUBRAM-09-001	9	Male	Right Angle	Locking type: Fix screw

◆ Dimensions of Connector (Unit is mm)

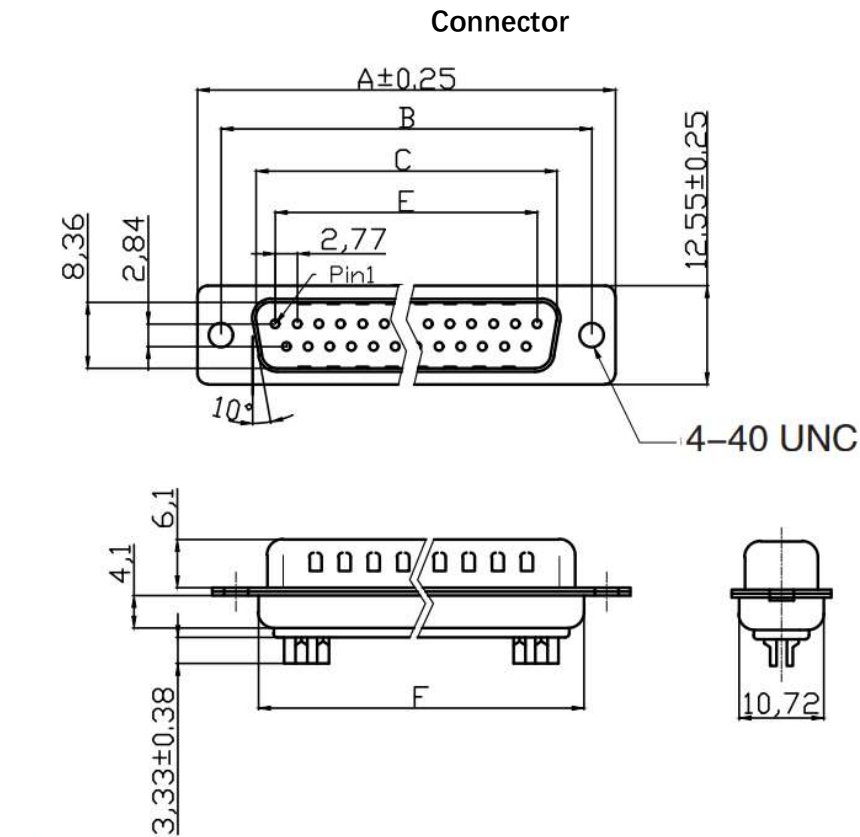

Dimensions

Positions	A	B	C	E	F
9	30.81	24.99	16.92	11.08	19.20
15	39.20	33.30	25.25	19.39	27.70
25	53.04	47.04	38.96	33.24	41.10
37	69.40	63.50	55.42	49.86	57.30

◆ General Information of Connector

Ambient Temperature:	-25℃ ~ +70℃	Insulation Resistance:	≥100MΩ
Connector Body:	PBT	Contact Resistance:	≤10mΩ
Connector Contacts:	Brass with nickel/gold plated	Shell:	Unavailable
Pitch:	2.84mm	Mating Endurance:	500 Cycles