


9Pin MINI DIN Female Molded Cable, Straight, With Shell



CE RoHS


◆ Dimensions of Cable Assembly (Unit is mm)

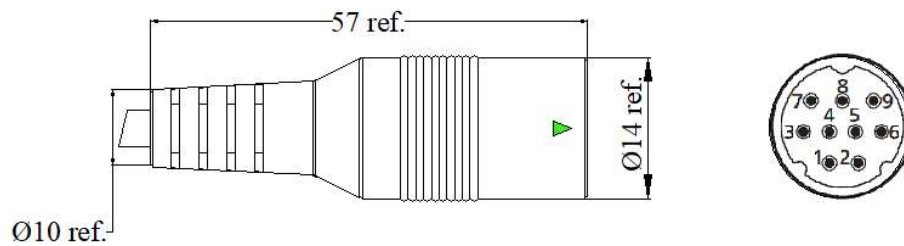

◆ General Information of Cable Assembly

Rated Current	1.5A Max.
Rated Voltage	12V
Insulation Resistance	≥100MΩ
Contact Resistance	≤5Ω
Operation Temperature	-20℃ ~+80℃
Poles	3-9 Poles straight can be customized (Refer to below SKU table)
Design Standard	Per VDE DIN standard
Cable	PUR/PVC cable (22-28AWG) options

◆ Pins Layout

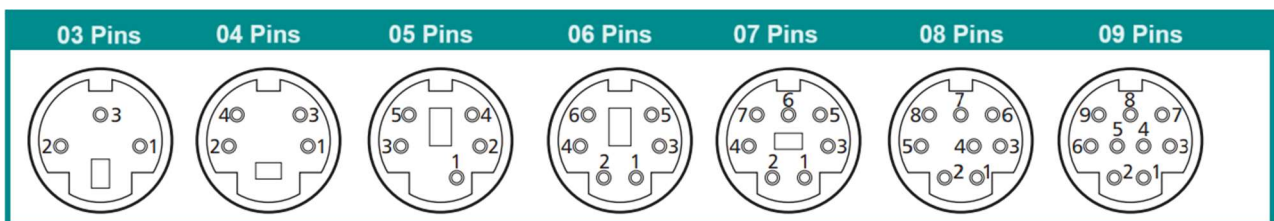


◆ SKU Table

SKU No.	Poles	Conn. Type	Overmoding Type	Remark
T-MDINSTF-03-001	3	Female	Straight	With shell
T- MDINSTF-04-001	4	Female	Straight	With shell
T- MDINSTF-05-001	5	Female	Straight	With shell
T- MDINSTF-06-001	6	Female	Straight	With shell
T- MDINSTF-07-001	7	Female	Straight	With shell
T- MDINSTF-08-001	8	Female	Straight	With shell
T- MDINSTF-09-001	9	Female	Straight	With shell

◆ Dimensions of Related Components (Unit is mm)

Connector

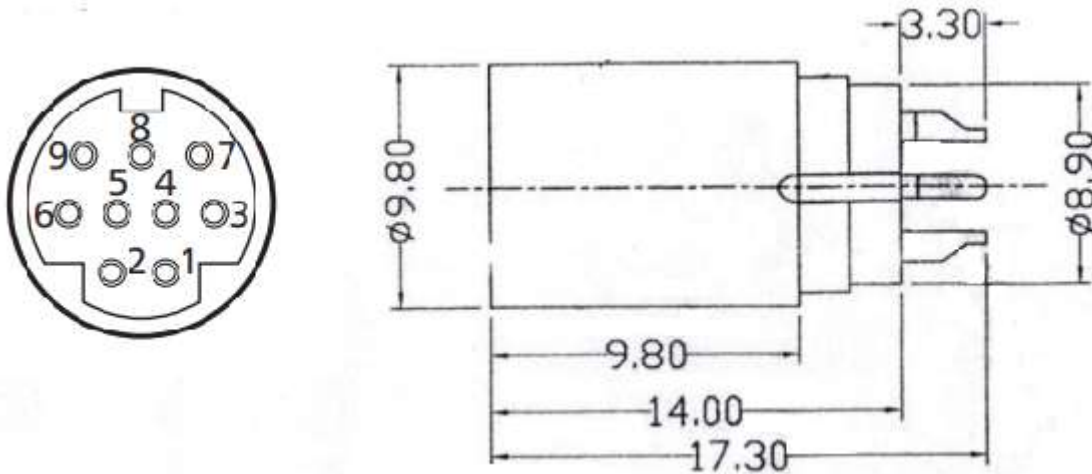

◆ General Information of Connector

Ambient Temperature:	-20℃ ~ +80℃	Insulation Resistance:	≥100MΩ
Connector Body:	PBT+GF/ABS	Contact Resistance:	≤10mΩ
Connector Contacts:	Brass with silver/tin	Shell:	Steel with nickel