

M23 Male With Base, Charging/Discharging Battery Connector, Cable Assembly



CE RoHS


◆ General Information of Cable Assembly

Rated Current	50A/10A/3A
Rated Voltage	500V/300V/60V /DC
Insulation Resistance	≥100MΩ
Contact Resistance	≤10 mΩ
Operation Temperature	-40℃ ~+105℃
Poles	2+1+5 Pins is available (Refer to below SKU table), 2+0, 2+5, 2+1+3 PIN can be customized
Water Resistance Level	IP67/IP68 in locked condition, optional
Cable	8AWG*2C+16AWG*1C+22AWG*5C,PVC or customized

◆ SKU Table

SKU No.	Poles	Conn. Type	Type	Remark
T-EM23BM-2-001	2+0	Male	Assembly	
T-EM23BM-7-001	2+5	Male	Assembly	
T-EM23BM-6-001	2+1+3	Male	Assembly	
T-EM23BM-8-001	2+1+5	Male	Assembly	

◆ Dimensions of Related Connector (Unit is mm)

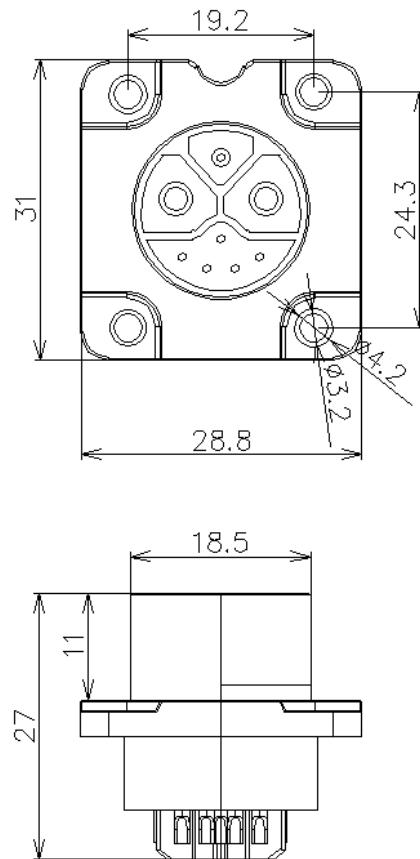

◆ General Information of Connector

Ambient Temperature:	-40℃ ~ +105℃	Insulation Resistance:	≥100MΩ
Connector Body:	UL94V-0	Rated Current:	20-50A
Connector Contacts:	Brass with silver/golded plated	IP Rating:	IP67/IP68 in locked condition optional